

■ Max. cutting capacity (height x width)

Cross Cut	Mitre Cut (left & right)	Bevel Cut (left & right)	Compound Cut	Crown molding, 45 degree type	Baseboard (Skirt board)
68 x 310 (2-11/16" x 12-1/4") 91 x 279 (3-5/8" x 11")	Mitre 45° left/right 68 x 218 (2-11/16" x 8-5/8") 91 x 197 (3-5/8" x 7-3/4")	Bevel 45° left 42 x 310 (1-5/8" x 12-1/4") 58 x 279 (2-1/4" x 11")  Bevel 45° right 29 x 305 (1-1/8" x 12") 43 x 279 (1-11/16" x 11")	Bevel 45° left 42 x 218 (1-5/8" x 8-5/8") 58 x 197 (2-1/4" x 7-3/4")  Bevel 45° right 29 x 215 (1-1/8" x 8-1/2") 43 x 197 (1-11/16" x 7-3/4")	Upright cutting 168 (6-5/8")  Horizontal cutting 248 (9-3/4")	Upright cutting 133 (5-1/4")  Horizontal cutting 305 (12")

■ Accessories

Vertical vise assembly  
Part No. 126617-2

Dust bag assembly  
Part No. 122852-0

Stand  
Part No. WST06


Horizontal vise assembly  
Part No. 122470-4


Stand  
Part No. 194061-1


Stand  
Part No. WST05

Crown molding stopper set  
Part No. 192628-9


**10" Cordless Dual Sliding Compound Mitre Saw DLS110 10" (255 mm)**



 Brake

 Soft Start

 Bevel Cutting 45 LR

 Dust Collection



**ADT DXT**

**Battery Capacities** Two 18V Li-Ion  
**Blade Diameter** 10" (255 mm)  
**Arbor** 5/8" (15.88 mm)  
**No Load Speed** 4,400 RPM  
**Overall Dimensions (L x W x H)** 31-3/4" x 25-3/8" x 26" (805 mm x 644 mm x 660 mm)

**Standard Equipment:** Tool Only. Batteries and Charger sold separately.  
10" C.T. Blade 40T (A-93669), Dust Bag (122852-0), Vertical Vise (126617-2), Triangle Rule (762001-3), Hex Wrench 6 (781044-6)

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca

**Makita** 10" Cordless Dual Sliding Compound Mitre Saw  
DLS110 10" (255 mm)

High power like AC model 18V X2  
For fast cutting and ripping



350 cuts  
Cutting 2x4 Wood  
(BL1850B)





# As powerful as AC model thanks to BL motor



**One-touch Sliding lock**  
can be easily done by removing/ inserting the lock pin.



Excellent sliding durability of safety cover

Front knob for easy bevel angle adjustment

## DXT

Diameter of slide pipe is changed from 25 mm to 30 mm. Moreover, by redesigning Arm section shape, the precision at bevel cutting is increased.



### Rail-forward design enables to be placed against a wall for maximizing work space

Motor head slides on fixed pipes without extending machine rear end, so the machine can be placed close to wall.

#### Conventional model

needed to set apart from the wall



#### DLS110

can be placed close to wall



## High power for fast cutting and ripping

- 18Vx2 Li-ion battery
- Brushless DC motor




## ADT

### Automatic torque Drive Technology




Automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

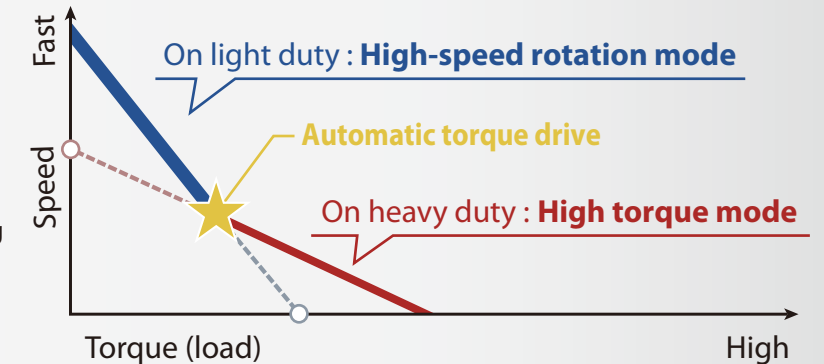

### Excellent dust collection

When cutting the low thin workpiece, the dust collecting is more effective than current model because of the improved dual dust collecting port.

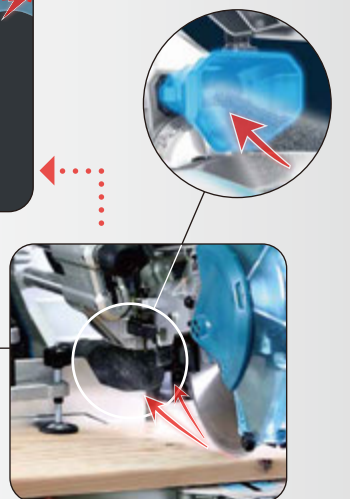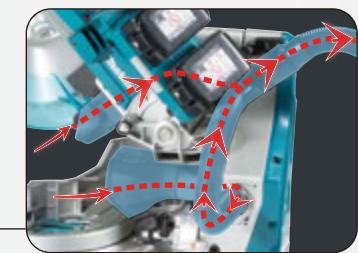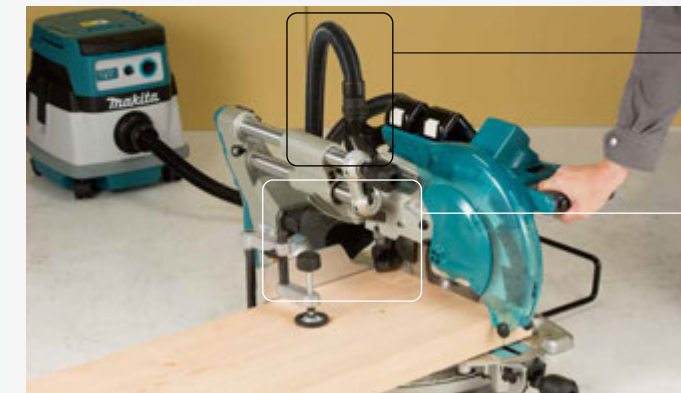


### Large turn base

supports even large workpiece stably.

### Easy-to-operate mitre angle lock

Mitre angle can be unlocked by turning Knob counterclockwise while pushing down Lock lever.

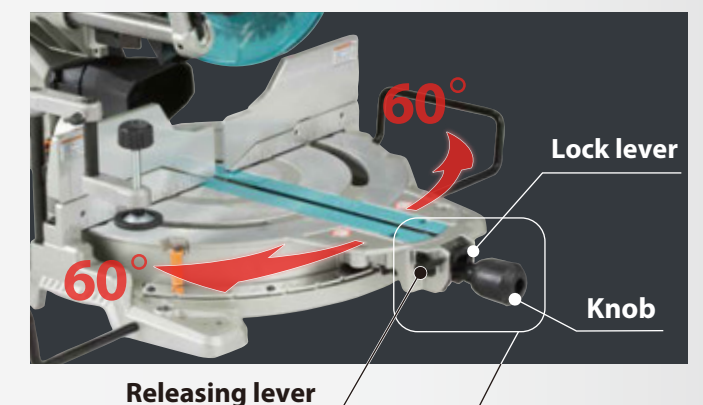

Once Releasing lever is pushed down:

- Turn base can be moved without pushing down Lock lever.
- The turning action is smooth because positive stops are released.
- Miters 0°-60° left and right, with positive stops at 0°, 15°, 22.5°, 31.6°, 45° and 60° (left and right)