


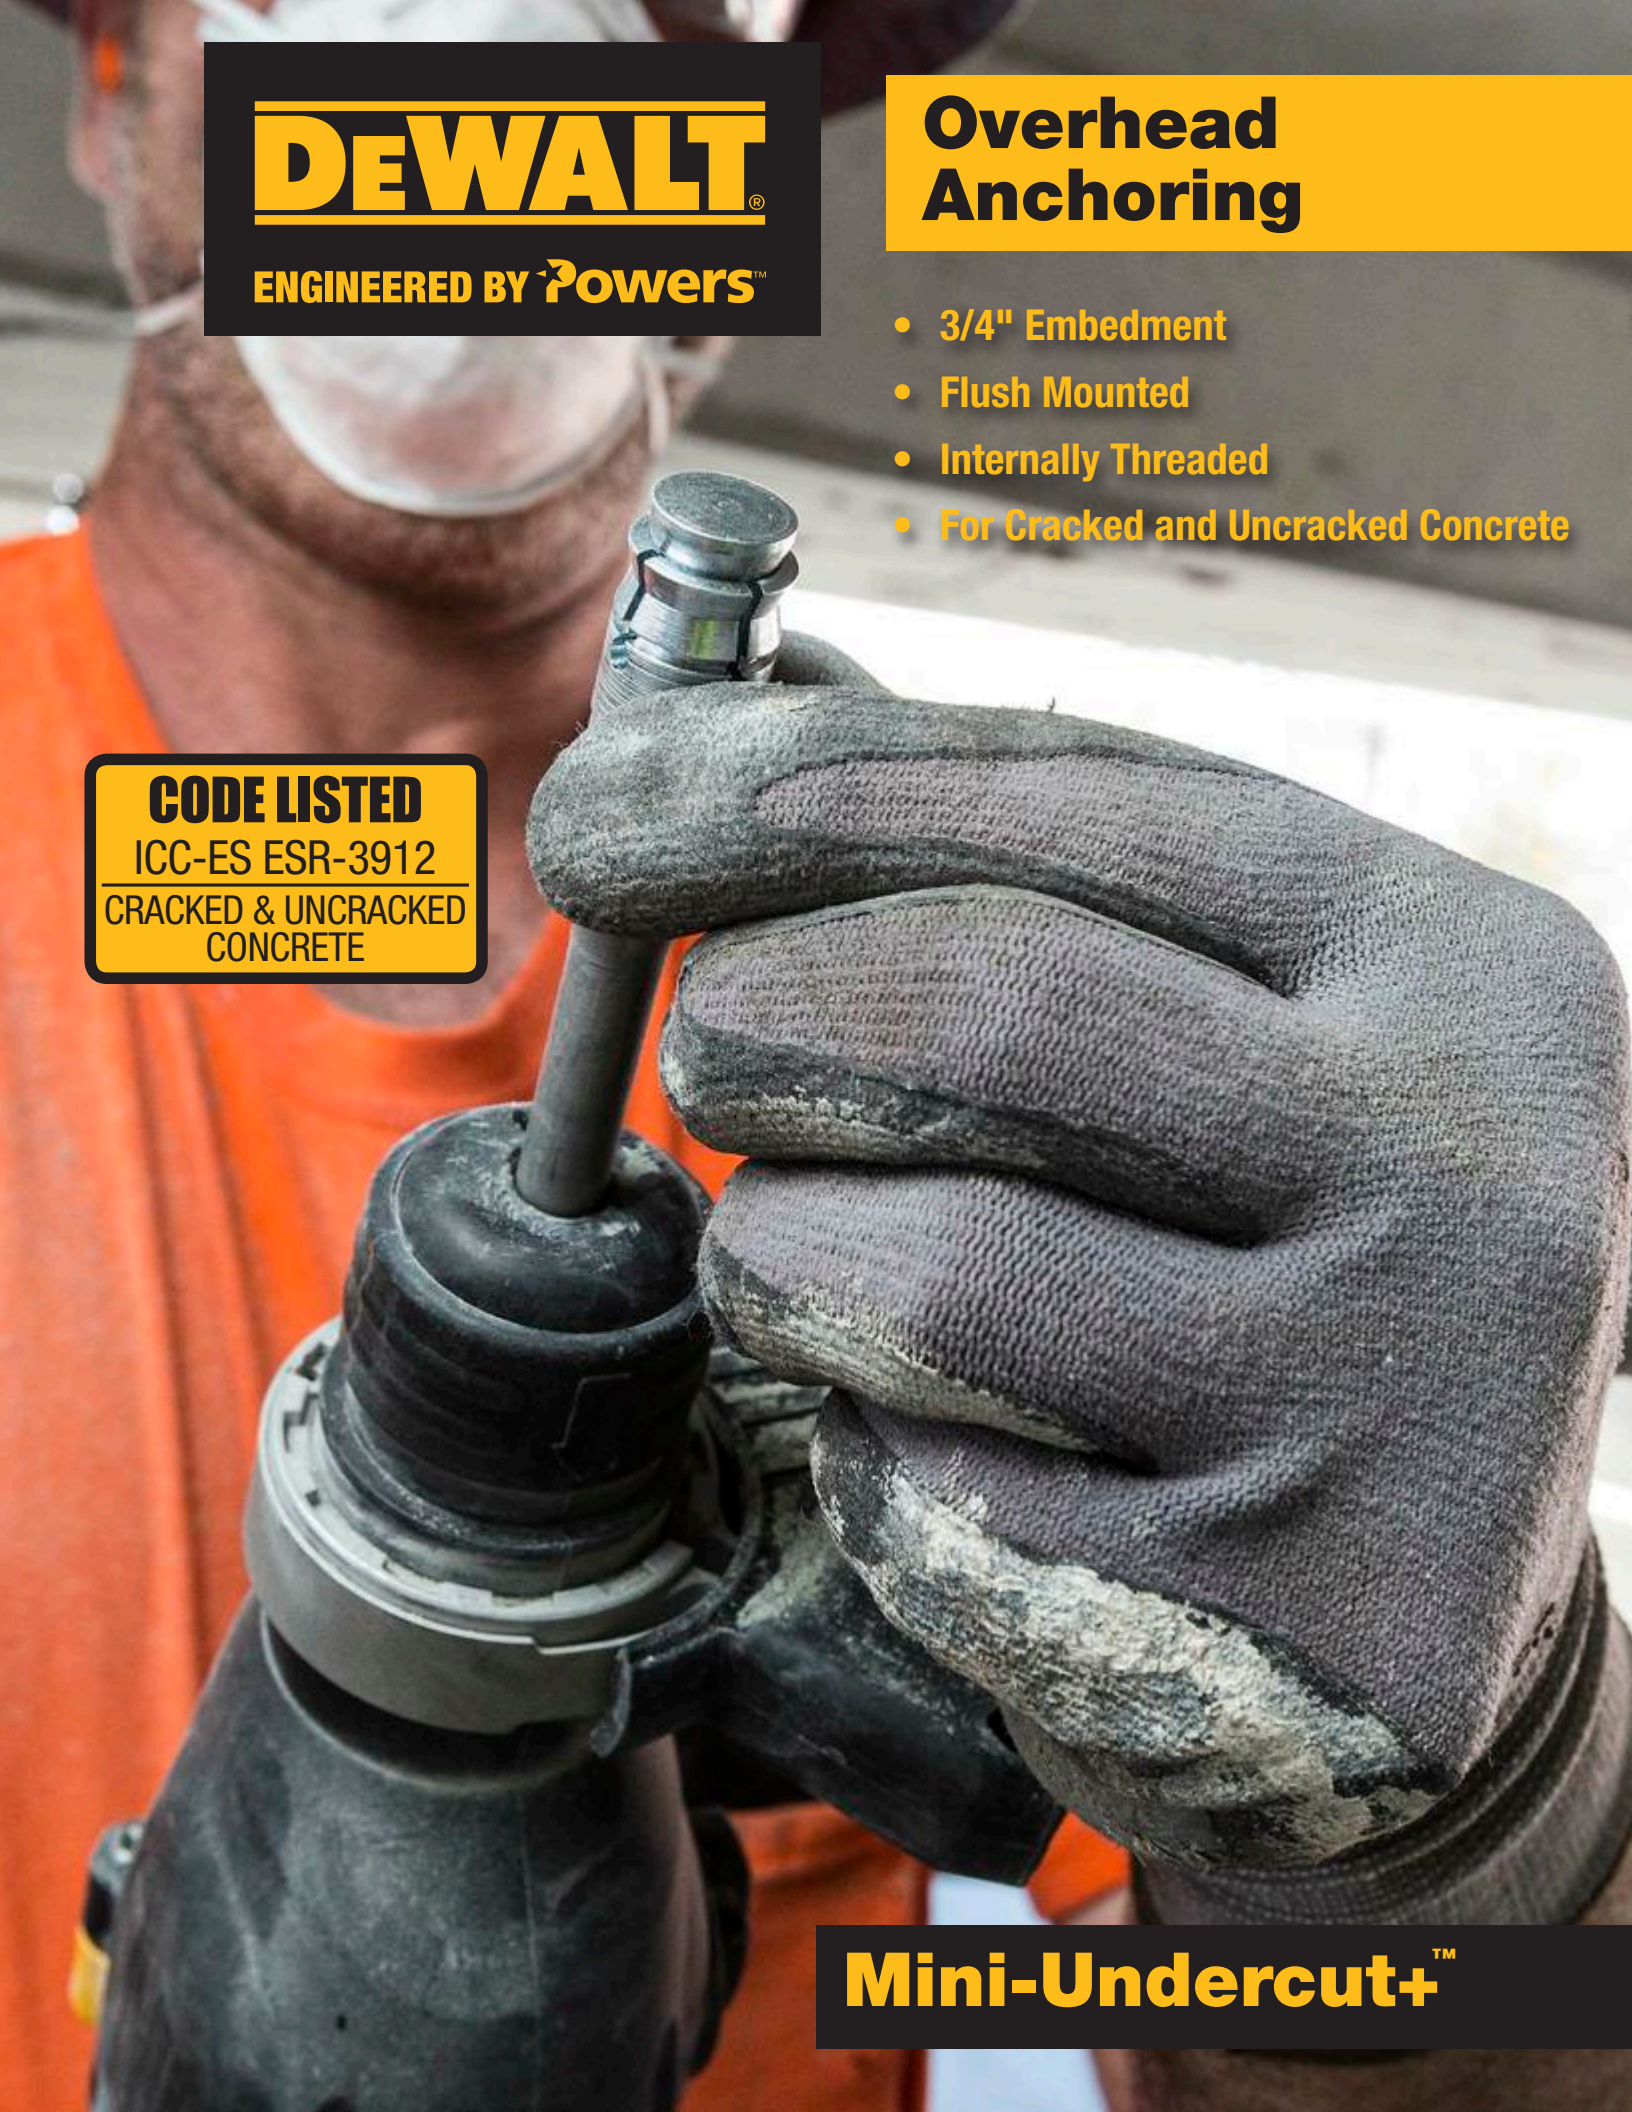

DEWALT®

ENGINEERED BY **Powers™**

Overhead Anchoring

- 3/4" Embedment
- Flush Mounted
- Internally Threaded
- For Cracked and Uncracked Concrete

CODE LISTED

ICC-ES ESR-3912

CRACKED & UNCRACKED
CONCRETE

Mini-Undercut+™

DeWALT®

ENGINEERED BY Powers™

Post Tension Concrete



Hollow Core Concrete




CODE APPROVED
3/4" long approved seismic anchor

PATENT PENDING GEOMETRY
patent pending design bites into concrete for undercut

THREADED SLEEVE
internally tapped sleeve provides full thread engagement

STOP BIT
widened shoulder eliminates potential for over drilling; solid carbide head for quick drilling

SDS+ SETTING TOOL
for fast installation

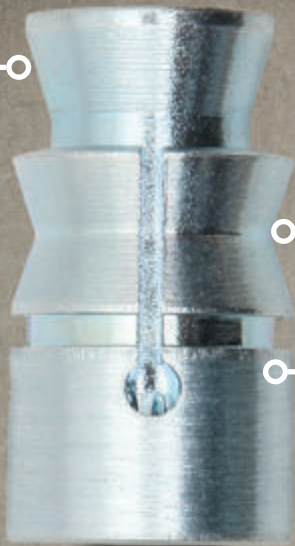

Mini-Undercut+™ Internally Threaded Undercut Anchor



Mini-Undercut+

CATALOG NUMBER	ANCHOR SIZE	ROD DIA	DRILL DIA	QTY	MASTER QTY
PFM2111820	3/8" x 3/4"	3/8"	5/8"	100	600

CATALOG NUMBER	USE ACCU-BIT	USE SDS+ SETTING TOOL
PFM2111820	PPA2431720	PFM2101720

Accu-Bit

CATALOG NUMBER	STOP BIT SIZE	ROD DIA	DRILL DIA	DRILL DEPTH	QTY
PPA2431720	5/8" x 3/4"	3/8"	5/8"	3/4"	1

SDS+ Setting Tool

CATALOG NUMBER	SETTING TOOL SIZE	ROD DIA	QTY
PFM2101720	3/8" SDS+ Setting Tool	3/8"	1

Installation Systems

CATALOG NUMBER	DESCRIPTION
DCH273P2	20V MAX* XR Brushless 1" L-shape SDS Plus Rotary Hammer Kit



* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

Dealer Stamp

1-800-4 DeWALT®

www.DeWALT.com